

30-Gallon

Two Stage Gasoline

The 30-gallon storage tank gives you the convenience and capability to run air and electrical power tools at the most remote locations. Save space, save money and reduce your load capacity with this combination unit.

Compressor Pump:

- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

Generator:

- Brushless alternator
- Total harmonic distortion (THD) less than 6%
- 100% copper windings
- Comes standard with (2) 120V, 15A and (1) 240V, 20A receptacles

Frame:

- Powder coated ASME coded 30-gallon receiver tank
- 3/16-inch base plate to reduce vibration
- 16-gauge powder coated two-piece belt guard

Components:


- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 16 1/2-inch fly wheel
- Quality pilot valve unloader

Limited Warranties:

- 1 year Mi-T-M engine
- 2 year alternator
- 2 year pump exchange (see page 65 for information)
- 3 year Honda & Kohler engines
- 5 year Subaru engine

Certifications:

- ASME Boiler and Pressure Vessel Code - UM




To see more online, scan here or go to www.mitm.com



AG2-SH13-30M

MODEL NUMBER	CFM @ 90 PSI	CFM @ 175 PSI*	MAX. OUTPUT	ALTERNATOR WATTAGE		RECEPTACLES	DISPLACEMENT/ ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
				CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD						
AG2-SH13-30M	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-15R, (1) NEMA L6-20R	389cc Honda OHV	Two stage, cast iron	40x24.5x45in.	550 lb.	450 lb.
AG2-SK14-30M	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-15R, (1) NEMA L6-20R	429cc Kohler OHV	Two stage, cast iron	40x24.5x45in.	550 lb.	450 lb.
AG2-SM14-30M	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-15R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage, cast iron	40x24.5x45in.	550 lb.	450 lb.
AG2-SR14-30M	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-15R, (1) NEMA L6-20R	404cc Subaru OHC	Two stage, cast iron	40x24.5x45in.	550 lb.	450 lb.

*Equipped with 150-PSI maximum rated regulator.

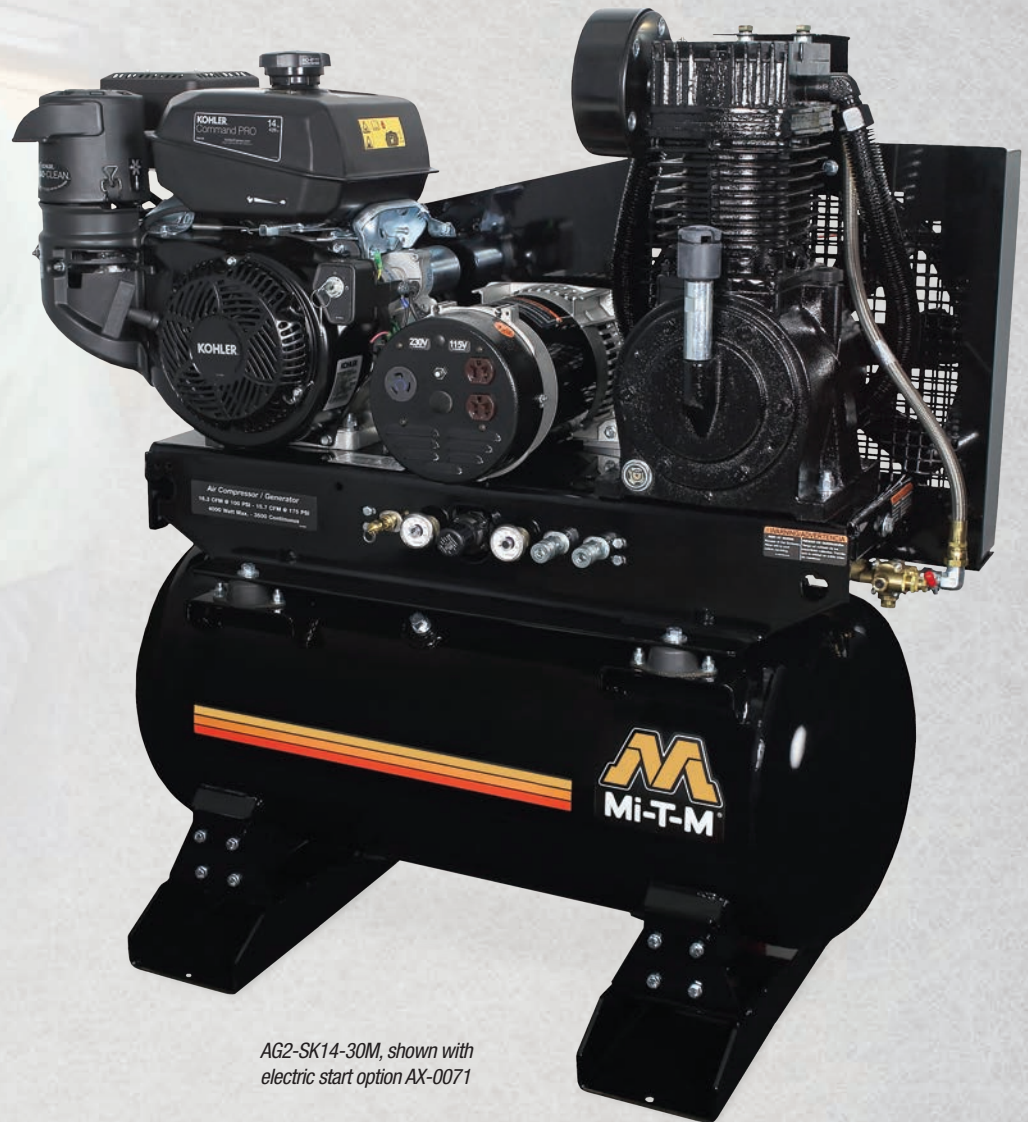

AG2-SK14-30M, shown with electric start option AX-0071

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
70-0358	Engine oil drain extension	Honda, Kohler & Mi-T-M models	AX-0070	Battery tray, box and 2-ft. of cables included	All models
70-0380	Engine oil drain extension	AG2-SR14-30M	AX-0071	Electric start - battery, box and cables not included	AG2-SK14-30M
AW-6000-1002	Equipment cover	All models	AX-0072	Electric start - battery box and cables included, battery not included	AG2-SK14-30M
AX-0019	Electric start - battery, box and cables not included	AG2-SH13-30M	AX-0073	Electric start - battery, box and cables not included	AG2-SM14-30M
AX-0062	Electric start - battery, box and cables not included	AG2-SR14-30M	AX-0074	Electric start - battery box and cables included, battery not included	AG2-SM14-30M
AX-0063	Lifting hook	All models	AX-0075	Idle down - includes electric start - battery not included	AG2-SM14-30M
AX-0064	Electric start - battery box and cables included, battery not included	AG2-SH13-30M	IX-0001	Vibration pads - recommended for models that are mounted in service truck applications	All models
AX-0065	Electric start - battery box and cables included, battery not included	AG2-SR14-30M	IX-0055	Remote start/choke; 6-ft. wire extension for key switch; you will also need to order AX-0019	AG2-SH13-30M
AX-0068	Idle down - includes electric start - battery not included	AG2-SH13-30M			
AX-0069	Idle down - includes electric start - battery not included	AG2-SR14-30M			