



“DBS” Dump Body Spreader (Front and rear tipping style)

- ▶ 10 Gauge Corten steel sides and front.
- ▶ 10 Gauge Corten steel tailgate on 10' and 10.5' lengths.
7 Gauge Corten steel tailgate on 14' length.
- ▶ Dirt shedding lower rub rails.
- ▶ 88" Interior width.
- ▶ 96" Exterior width.
- ▶ Retractable 10 gauge Corten steel body headboard for increased capacity when used as a dump body (10' and 10.5' lengths only).



- ▶ Conventional dump body and material spreader built in together as one unit.
- ▶ Double acting underbody style hoist designed for spreader/dump use.
- ▶ “Severe service” design for municipal use.
- ▶ Double acting tailgate.
- ▶ High performance and low maintenance design.
- ▶ Removable conveyor cover for chain protection during summer use.

“QUALITY by DESIGN”




"DBS" Dump Body Spreader (Front and Rear Tipping Style)




Double acting heavy duty six panel tailgate with optional coal door(s). The tailgate has 1-1/2" heavy duty offset upper hinge ears with 1-1/4" diameter hinge pins. It also has 3/8" tailgate spreader chains included standard.

- OPTIONAL EQUIPMENT**
- Chassis mounted cab guard.
 - Coal door (s) in tailgate.
 - "DBS" screen packages.
 - Poly lined chute.
 - 18" polymer spinner.
 - Folder up ladder
 - Ladder (2 steps)
 - Spinner Deflector.
 - Vibrator and mount kit.
 - Valve kit and flow valve.

The unit has a front mounted conveyor that feeds material from the passenger side to the drivers side of the body. The conveyor is 11" wide using 667X pintle chain with 3/8" drag bars on 7-1/2" centers. The chain tensioning system uses screw adjustable take-ups mounted on the exterior of the body for easy accessibility. The material is conveyed to a front mounted chute and spinner arrangement. Spinner assembly is adjustable to allow you to spread material where you want it. Our adjustable metering door allows you to limit or increase the amount of material that you move to the spinner. The spinner is 18" diameter with six (6) vanes and is hydraulically powered. The spinner assembly can be removed for summer use. The body has a removable conveyor cover to cover the conveyor when the body is being used as a conventional dump body.

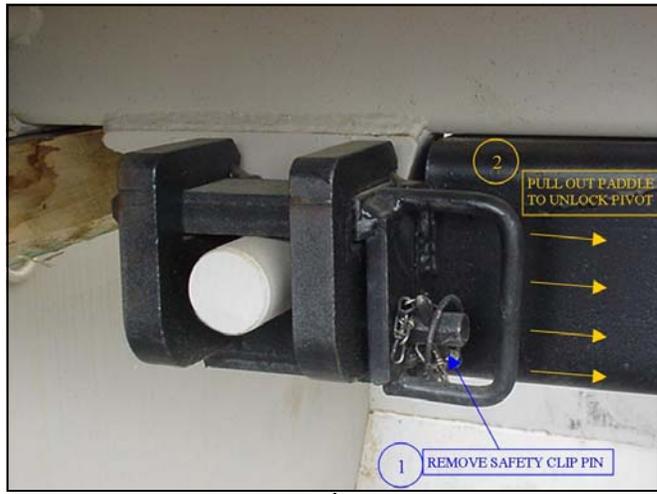

The unit has a manual main hinge locking system. This system enables the operator to switch between spreader mode and conventional dumping mode. The switching operation is simplistic in design allowing the operator to simply remove the locking paddles from each side of the hoist and relocate the paddles in the matching receivers located at the opposite end of hoisting unit. The manual paddle design is lightweight and low maintenance.

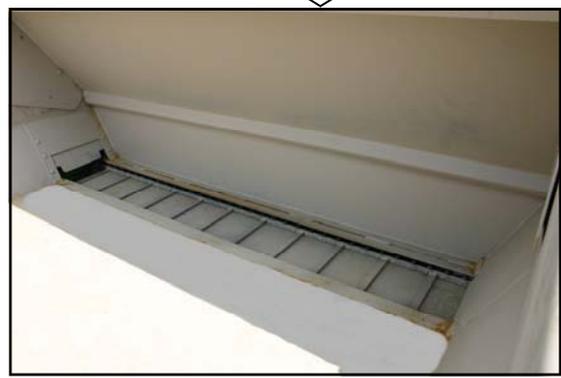

Models Available			
Model	Length	Sides	Tailgate
DBSH10G2834	10'	28" High	34" High
DBSH10.5G2834	10.5'	28" High	34" High
DBS14G4237	14'	42" High	37" High

Everest Equipment Company
 1077 Westmount
 Ayer's Cliff, Quebec J0B 1C0 CANADA

819-838-4257
 819-838-5653 fax

wausau-everest.com



Wausau Equipment Company, Inc.
 1905 South Moorland Road
 New Berlin, WI 53151-2321 U.S.A.

800-788-6066 ~ 262-784-6066
 262-784-6720 fax

wausau-everest.com

Wausau-Everest reserves the right to change products and specifications without notice. FRINK AMERICA is a registered trading style of Everest Equipment Co.